

# ACP Coalescer Filters

API/EI 1581, 3<sup>rd</sup> Edition Qualifided



Racor's API/EI qualified 3<sup>rd</sup> edition coalescer filters are manufactured using multi-layered particulate capture media and a resin-impregnated glass fiber coalescing core. No metal center-tube is used in order to provide efficient coalescence and reduce restriction allowing the filter to be crushable/ incinerable for disposal.

The unique combination of medias employed provides the industry with one of the most efficient particulate and water removal filters available.

In addition to its high efficiency, the Racor ACP filter can provide customers with a low initial pressure drop and longer life when compared with other competitors products.

These filters remove free and emulsified water, physical contamination, and are specifically designed for aviation turbine fuel (Jet A, Jet A1). They can also be used with other types of fuels and hydrocarbon distillates from the refinery through the distribution system.



## Contact Information:

Parker Hannifin Corporation

**Racor Division**

P.O. Box 3208

3400 Finch Road

Modesto, CA 95353

**phone 800 344 3286**

**209 521 7860**

**fax 209 529 3278**

**racor@parker.com**

[www.racorcustomers.com](http://www.racorcustomers.com)

[www.parker.com/racorproducts](http://www.parker.com/racorproducts)

## Product Features:


- API/EI 1581 3<sup>rd</sup> Edition Group I/II, Category B Qualified
- In to Out flow direction
- Removes free and emulsified water from fuel
- Standard end cap offering
- Rigid glass-fiber coalescing shell
- No perforated center tube - allows for 100% coalescing area
- No metal components
- Industry standard filter dimensions
- Glass filled nylon end-caps
- Replaces competitor filters
- Compatible with biodiesel blends
- Viton<sup>®</sup> seals and gaskets are standard

Note: Viton is a registered trademark of DuPont.™




ENGINEERING YOUR SUCCESS.

# How To Build A Part Number

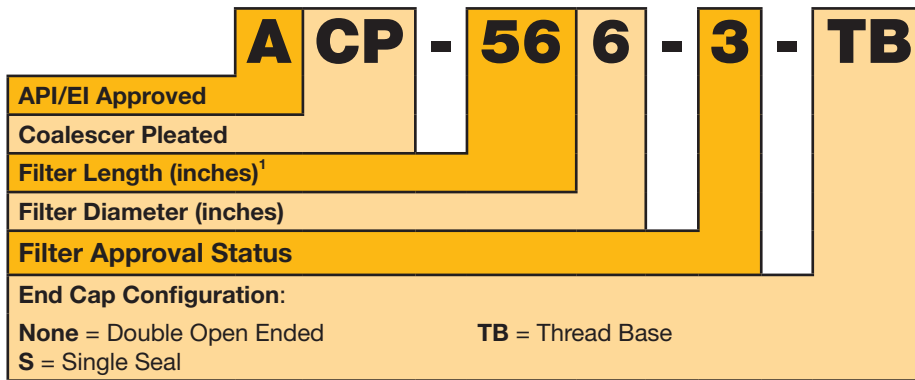

<sup>1</sup>Filter length is nominal of the media pack and does not represent the overall filter length. Depending on the end-cap configuration, the nominal overall filter length will be an additional 0.625 to 1.750 inches in length.

## Torque Specifications

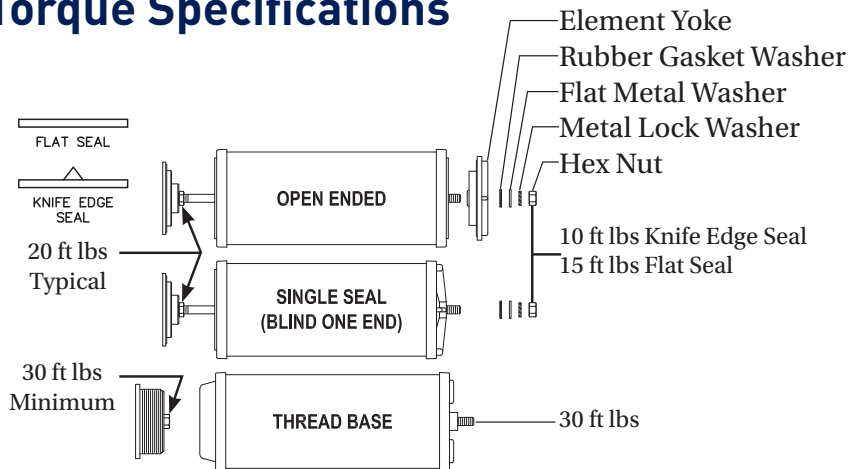

## Added Benefits:

- Low disposal cost
- No metal center tube
- Crushable and incinerable
- High efficiency particulate removal
- Larger filtering surface area
- Low initial pressure drop
- Long filter life

See brochure **7791** for information on Racor's SS and ST separator filters.

See brochure **7537** for information on the complete line of Racor Hydrocarbon products.

See brochure **7788** for more information on filtration products for the aviation industry.

## Technical Specifications

<b>Micron Rating</b>	1 Micron
<b>Flow Direction</b>	Inside to Outside
<b>Water Removal Efficiency</b>	15 ppm <sup>2</sup>
<b>Change-out Pressure</b>	15 PSID (1.0 bar)
<b>Ambient Temperature Range</b>	-40° to +160°F (-40° to +71°C)
<b>Maximum Temperature Range</b>	190°F (88°C)
<b>pH Range</b>	5-9

<sup>2</sup>When used with appropriately matched SS or ST series separators.

DISTRIBUTED BY:



***BOLLAND  
MACHINE***

A DIVISION OF DIESEL ENGINE PARTS WAREHOUSE INC.

**Contact Us for Product Information  
or to Place an Order**

**Phone** 724-846-1290

**Fax** 724-846-5253

**Email** *kevin@bollandmachine.com*

**Address** 2718 Darlington Road  
Beaver Falls, PA 15010

**[www.bollandmachine.com](http://www.bollandmachine.com)**