400 Series

Take the Guesswork out of Filter Maintenance



A fuel restriction indicator with a locking feature is now standard for every aftermarket (non-OEM) 445R, 460R, 490R, 4120R, and 4125R Series Fuel Filter/Water Separator beginning in January 2009.

The fuel restriction indicator simply replaces the standard air vent plug. The indicator installs directly into the vent port on the filter head and includes an O-ring seal.

Racor fuel restriction indicators allow operators to monitor filter condition at a glance. As restriction increases, the yellow indicator moves down towards the red "service" area. The yellow indicator will keep its position until the reset button is pressed, even after the engine is shut down. No more guesswork, simply change the filter before the indicator reaches the red zone and avoid costly roadside downtime.

RK 32036 Fuel Restriction Indicator Use a 16mm open-end wrench to install or remove the filter minder (do not tighten by hand) 490R30 Filter Assembly

Contact Information:

Parker Hannifin Corporation

Racor Division

P.O. Box 3208 3400 Finch Road Modesto, CA 95353

phone 800 344 3286 209 521 7860 fax 209 529 3278 racor@parker.com

www.parker.com/racor www.parker.com/racorproducts


Features and Benefits:

- Onboard diagnostic tool
- Maximizes fuel filter life
- Easy to install
- Takes the guesswork out of fuel filter maintenance
- Rugged and reliable
- Lowers operational costs
- Use with diesel, ethanol, and biodiesel fuels
- Shows restriction up to 10 inHg

Specifications	RK 32036
Accuracy	± 10%
Calibrations	10 inHg (34 kPa) at red zone
Material	Chemical Resistant Nylon
Length	2.5 in. (6.4 cm)
Diameter	1.3 in. (3.3 cm)
Port Thread	3/8" SAE
Operating Temperature	-40° to +250°F (-40° to +121°C)



DISTRIBUTED BY:

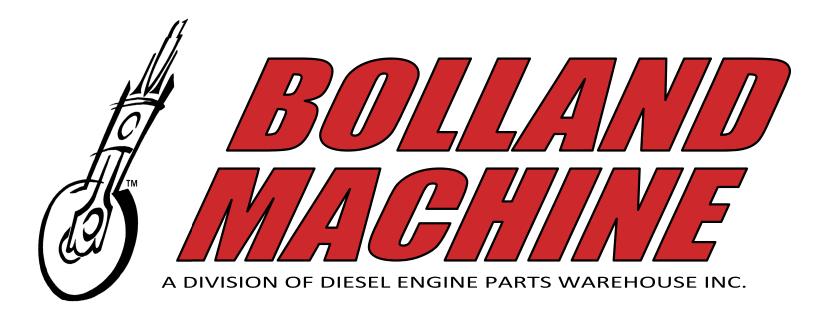

Contact Us for Product Information or to Place an Order

Phone 724-846-1290

Fax 724-846-5253

Email kevin@bollandmachine.com

Address 2718 Darlington Road

Beaver Falls, PA 15010

www.bollandmachine.com